



DADPE

Antumbra Display EU

Contemporary button panel with colour LCD

The Antumbra Display user interface provides a central display to present multiple pages of functions and system information. It incorporates the latest in field effect technology.

The contemporary design features a number of button configurations, with each button capable of local or site-wide control functions. The DADPE range is suitable for, but not limited to, European, Middle Eastern, African, and Asian markets.


DADPE

Contemporary button panel with colour LCD

- **Field effect proximity detection*** – The user interface detects an approaching user and 'wakes up', initiating a wall-wash lighting effect to encourage interaction.
- **Supplied as two components** – The Application Module contains buttons, rim, base and mounting plate, which can be mixed and matched to suit décor. The Communication Module contains all of the logical and network functions and is pre-programmed off-site, allowing commissioning to commence prior to finish options being finalized.
- **Hidden sensory inputs** – Built-in temperature and humidity sensors automatically adjust air conditioning when integrated into the system.
- **Multiple language and icon labeling** – Button labeling language choices include English, Chinese and Arabic. A library of common icons transcends language barriers, which is particularly useful in hospitality applications.
- **Colour LCD** – Navigate up to 16 pages of button functions and system information such as temperature, time, channel level, and current scene.
- **Décor-matching options** – Buttons and rims are available in a range of attractive polycarbonate and metallic finishes.
- **64-channel DMX Tx support** – Can be factory-set to DMX instead of DyNet, to communicate directly with DMX512 fixtures.

* The mounting plate must be grounded to avoid field effect false triggering by nearby ungrounded metal objects.

Dimensions

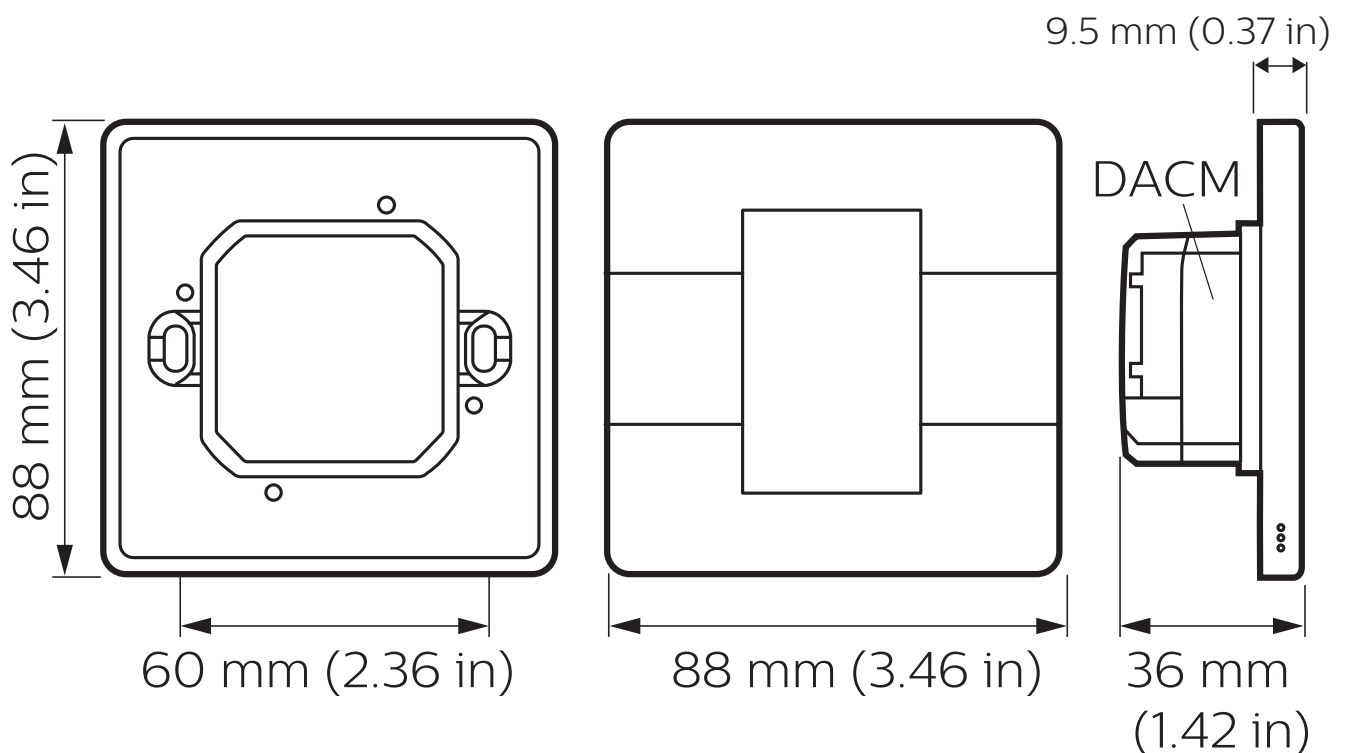

Specifications

Due to continuous improvements and innovations, specifications may change without notice.



DADPE
Antumbra Display EU

Electrical

Supply Type	DyNet
Supply Voltage	12-24 VDC SELV/Class 2
Supply Current	90 mA @ 12 VDC 50 mA @ 24 VDC

Application Module

User Inputs	6 x software-configurable buttons
Indicators	White indicator LED on each button White wall-wash backlight TFT IPS LCD
Temperature Sensor Range	5° to 40°C (41° to 104°F)
Temperature Sensor Accuracy	± 1°C (± 1.8°F)
Humidity Sensor Accuracy	± 5%

Communication Module

Serial Ports	1 x RS-485
Supported Protocols	DyNet DMX Tx
DMX Tx Channels	64
User Inputs	1 x service switch
Indicators	1 x service LED

Physical

Dimensions (H x W x D)	88 x 88 x 36 mm (3.46 x 3.46 x 1.42 in) (fully assembled)
Packed Weight (application module)	0.2 kg (0.44 lb)
Packed Weight (communication module)	0.12 kg (0.25 lb)
Serial Ports	1 x 5-way pluggable screw terminal +V, D-, D+, GND, SHLD
Serial Port Conductor Size	2.5 mm ² (#12 AWG) (max)

Environment*

Operating Temperature	-5° to 50°C ambient (23° to 122°F)
Storage/Transport Temperature	-25° to 60°C ambient (-13° to 140°F)
Relative Humidity	0 to 90% non-condensing
IEC Pollution Degree	II


Compliance

Certification	CE, RCM, FCC, ICES, EN50491-3, UKCA, RoHS
IP Rating	IP22


* For indoor installation only

Fascia and Rim Finishes


Lacquer fascia finishes



Luxe fascia finishes

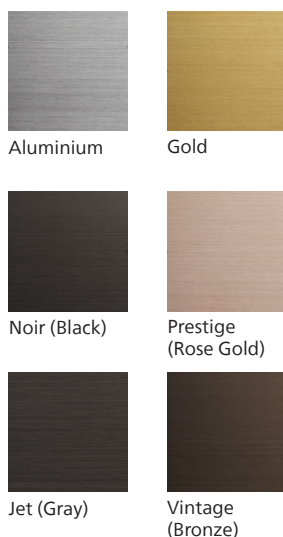


Rim finishes

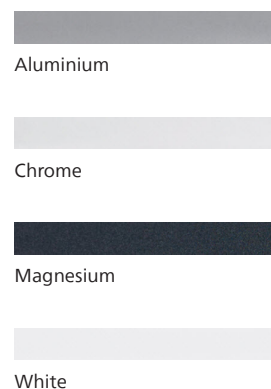

NOTE: Luxe colours are created through a batch-controlled anodising process. Separate batches may vary slightly in colour and surface appearance.

Antumbra Display Panel Assembly

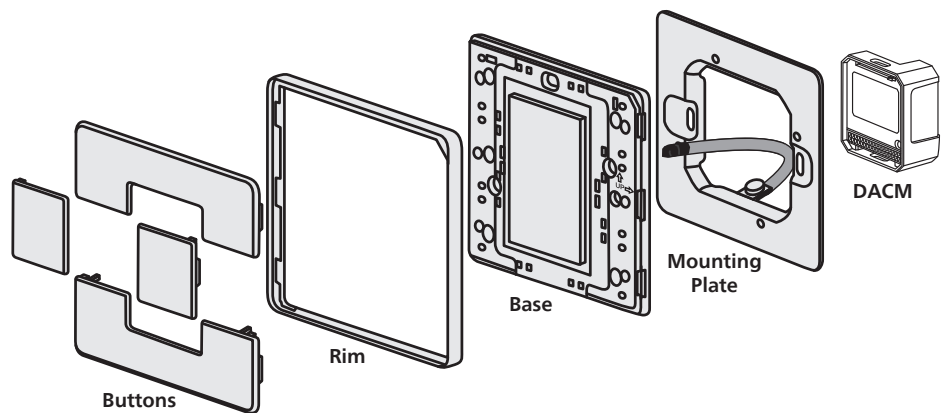

Application Module Ordering Code

The Application Module contains the buttons, rim, base and mounting plate. The buttons and rim are available in the range of finishes shown below. The base contains all the sensors and LED indicators. Sensitive components are enclosed by a rubber envelope to give an IP22 rating, allowing installation in high-condensation environments such as bathrooms. A metal mounting plate attaches the Antumbra panel securely to the wall, ensuring stable, reliable operation.



DADPE-SM-X

Button Finish	Rim Finish	Button Labeling
Lacquer (Polycarbonate)	A = Aluminium	X = Not Available
M = Magnesium	C = Chrome	
S = Silver	M = Magnesium	
W = White	W = White	
Luxe (Metallic)		
A = Aluminium		
G = Gold		
J = Jet		
N = Noir		
P = Prestige		
V = Vintage		

Communication Module Ordering Code

The Communication Module is compatible with all interfaces across the Antumbra series, and can be ordered, programmed, installed, wired and tested without the Application Module attached. This allows the commissioning process to begin before the final finish options have been chosen, or during construction, and protects the Application Module from damage until the site is ready for occupancy.



Product	Philips 12NC
DACM-DyNet (DyNet communication module)	913703072809
DINGUS-DUS-DUAL-RJ12 (dual RJ12 connector - pack of 10)	913703064309
DINGUS-UI-DUAL-RJ45 (dual RJ45 connector - pack of 10)	913703334609

