



# PDZG-E

Zigbee Gateway

# Reliable wireless lighting control


This wireless communication hub translates between Ethernet and Zigbee, connecting multiple Zigbee nodes (compatible luminaires and/or wireless signal dimming controllers) to the Dynalite control system.

# PDZG-E

# Reliable wireless lighting control

- **Zigbee PRO wireless communication –** Seamlessly integrate wireless lighting control into a Dynalite system without expensive wiring.
- Wireless mesh network Ensures stable and robust lighting control in busy environments.
- Fully compatible with the Dynalite portfolio Enable wireless control via Ethernet from any interface, sensor, or task/schedule host device connected to the Dynalite system.
- Wall mount bracket included Easy to mount on any wall type.

### **Dimensions**

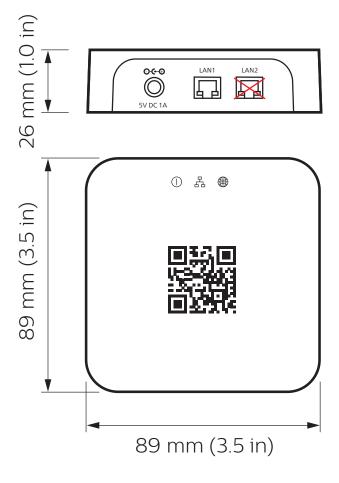

 $\begin{tabular}{ll} Specifications \\ Due to continuous improvements and innovations, specifications may change without notice. \\ \end{tabular}$ 



PDZG-E Zigbee Gateway

#### **Electrical**

Power Supply Input	100-240 VAC, 0.3 A, 50/60 Hz
Power Supply Output	5 VDC 1 A (Class 2/SELV)
IEC Overvoltage Category	III
Wireless	
Maximum Mesh Network Gap	10 m
Maximum Nodes Per PDZG-E	60
Control	
Communication Ports	1 x Ethernet (10/100 baseT) 1 x Zigbee
Supported Protocols	TCP IPv4/IPv6 UDP
User Input	1 x Service button
Indicators	1 x Power LED

### **Physical**

Fundament		
Included Plug Types	A, B, C, G	
Supply Terminal	1 × DC plug 5.5 mm (0.22 in) $\Theta$ $\bullet$	
Communication Ports	1 x RJ45 (LAN2 port inactive)	
Color	Signal white (RAL9003)	
Construction	ABS	
Net Weight (including bracket)	95 g (0.21 lb)	
Mounting Bracket (H x W x D)	97 x 97 x 34 mm (3.82 x 3.82 x 1.34 in)	
Dimensions (H x W x D)	89 x 89 x 26 mm (3.50 x 3.50 x 1.02 in)	

#### **Environment**

Operating Temperature	-20° to 45°C ambient (-4° to 113°F)
Storage/Transport Temperature	-40° to 80°C ambient (-40° to 176°F)
Relative Humidity	0 to 80% non-condensing (operating) 0 to 90% non-condensing (storage)
IEC Pollution Degree	II

### **Compliance**

1 x Network LED

Certification CE, RCM, UL/cUL, FCC, UKCA, RoHS











# **Ordering Code**

**Philips 12NC Product** 913703372109 PDZG-E